55" OUTDOOR DIGITAL ADVERTISING DISPLAY

34 Salisbury Street London, NW8 8QE Tel: 0044 (0) 208 778 1414

e-Mail: sales@hantarex.com

Hantarex International Limited













24/7 Usage

High Definition Display

LED Backlight Technology

Weatherproof



Plug and Play Media Player



00000

4DMI





Eco-Friendly

Multiple AV

Wide Viewing Angle

Vandal Proof













SUNLIGHT READABLE

Brightness is paramount when using outdoor screens, these displays use commercial grade Ultra High Brightness panels (1500 cd/m2); more than 4 times brighter than a standard home TV to allow easy readability in direct sunlight.



OUTDOOR ENCLOSURE

Designed with robust, corrosion protected, casing to protect against the elements and the public. With an IP65 rating, it keeps out all airborne particles as well as being protected from any wet weather conditions and also feature waterproof over molded AV connectors. The enclosures are made from mild steel and have thermally toughened glass.

ADVANCED TEMPERATURE CONTROL SYSTEM

The internal air-conditioning system allows the screens to be in constant use in an outdoor environment. Internal fans keep the panel and other internal components at the optimum working temperature; ensuring a long and reliable life for your display.







Anti Reflective Glass

ANTI-REFLECTIVE GLASS

The glass frontage is also anti-reflective to help defuse direct sunlight shining on the display.

55" OUTDOOR DIGITAL ADVERTISING DISPLAY

Hantarex International Limited 34 Salisbury Street London, NW8 8QE Tel: 0044 (0) 208 778 1414

e-Mail: sales@hantarex.com



BUILT-IN MEDIA PLAYER

As well as having AV inputs, these displays also have a built-in HD media player allowing you to run content copied from a USB drive. Load your pictures and videos onto a USB memory stick then insert it into the display, the screen will then start playing the pictures and videos in a continuous loop. The displays can also be upgraded to be updated remotely via a cloud-based CMS.

FREE LANDSCAPE/PORTRAIT WALL MOUNT

The display can be mounted in either landscape or portrait orientation, depending on the application. We also include a free wall mounting bracket that allows you to install your display in either landscape or portrait orientation and lock it in place.







IP65 Rated Waterproof AV Inputs





Product In Situ


Aluminium Surround and Rear

Hantarex International Limited 34 Salisbury Street London, NW8 8QE Tel: 0044 (0) 208 778 1414

e-Mail: sales@hantarex.com

55" OUTDOOR DIGITAL ADVERTISING DISPLAY

DRAWING:

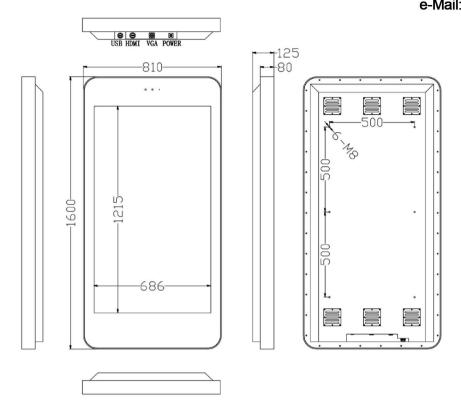

FULL SPECIFICATION:

	EEN COLUMN DISTRICT DISTRICT DISTRICT
	55" Outdoor Digital Advertising Display
Active Area (WxH mm)	686x1215
Resolution	1080x1920
Pixel Pitch	0.21x0.63
Colour	1.073 G
Brightness (cd/m2)	1500
Contrast Ratio	8000:1
Viewing Angle	178°
Response Time	4.5ms
AV Inputs	VGA, HDMI
Operating Voltage	AC100-240V(50Hz-60Hz)
Power Consumption (W)	350
Enclosure Protection	IP65
Lifetime (hours)	50,000
Overall Unit Size (WxHxD mm)	810x1600x125
Net Weight (kg)	80
Environmental	Operating Temperature: -10°C - 50°C Operating Humidity: 10% - 80% Storage Temperature: -30°C - 60°C Storage Humidity: 5% - 90%
Supported Media Formats	Video (MPG, AVI, MP4), Image (JPG, BMP, PNG)
Accessories	AC Power Cable, Remote Control, HDMI Cable, Lockable Wall Mount
Optional Extras	IR Touch Screen