HANTAREX
ELECTRONIC SYSTEMS

# Chassis Monitor

## Ultra View Angle LCD

15"

RoHS COMPLIANT 2002/95/EC

### Specifications

| | |
|---|---|
| Model Name | HANR15L600-CHM4 |
| Viewable Size Image | 15" |
| Active Display Area(mm) | 304.128(H)x228.096(V) |
| Pixel Pitch(mm) | 0.297(H)x0.297(V) |
| Number of Pixels | 1024x768 |
| Contrast Ratio | 700:1(typ.) |
| Display Color | 16.2M(6bit+FRC) |
| Brightness(cd/m ²) | 450(typ.) |
| Viewing Angle(CR>=10) | -80~80(H);-80~40(V)(typ.) |
| Synchronization Range Horizontal/Vertical | 31.5~60.0KHz/60~75Hz |
| Recommended Resolution | 1024x768@60Hz,75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | AC100~240V, Universal, ±10% |
| Power Consumption | 30W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Resistive,Capacitive,SAW,IR |

Remarks:HANR15L600 series= VGA Input only
HANR15L630 series= VGA+Video nput

The Hantarex Semi Pro range of small, LCD chassis displays are housed in sleek metal housings which give them a custom design look. Wall mounting is achieved using a rear VESA connection.

They are offered in many different sizes from 6.5" in a 4:3 format up to 26" in a 16:9 format. They all have a standard PC (VGA) input but in addition can have video (PAL) and DVI inputs The choice of screens is also impressive with standard, touch and transflective available.

### Mechanical Drawing

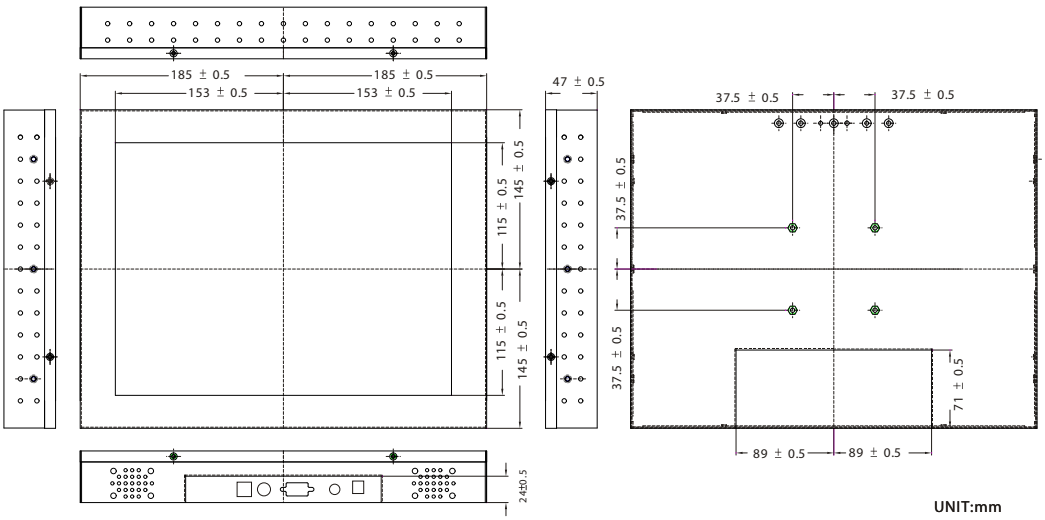


UNIT:mm


Hantarex International Limited
34, Salisbury Street, Marylebone, London NW8 8QE, UK
Phone: +44(0)20 8778 1414 - e-mail: sales@hantarex.com - web: www.hantarex.com