HANTAREX
ELECTRONIC SYSTEMS

Chassis Monitor

Chassis Monitor

19"

RoHS COMPLIANT 2002/95/EC

Specifications

Model Name	R19L300-CHM1
Viewable Size Image	19"
Active Display Area(mm)	376.32(H)x301.06(V)
Pixel Pitch(mm)	0.294(H)x0.294(V)
Number of Pixels	1280x1024
Contrast Ratio	800:1(typ.)
Display Color	16.7M (8 bits/colors)
Brightness(cd/m ²)	300
Viewing Angle(CR>=10)	-80~80(H);-80~80(V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280x1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	41W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive,Capacitive,SAW,IR

Remarks:R19L300 series= VGA Input only

R19L340 series= VGA+Video Input

The Hantarex Semi Pro range of small, LCD chassis displays are housed in sleek metal housings which give them a custom design look. Wall mounting is achieved using a rear VESA connection.

They are offered in many different sizes from 6.5" in a 4:3 format up to 26" in a 16:9 format. They all have a standard PC (VGA) input but in addition can have video (PAL) and DVI inputs The choice of screens is also impressive with standard, touch and transflective available.

Mechanical Drawing

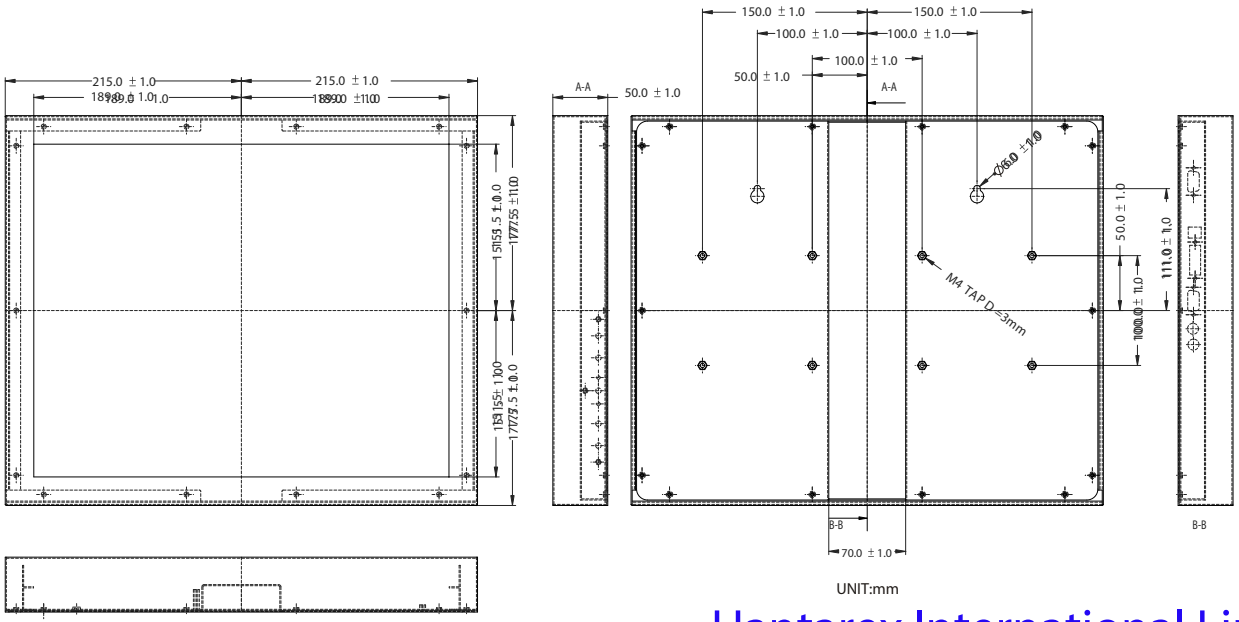

UNIT:mm

Hantarex International Limited

34, Salisbury Street, Marylebone, London NW8 8QE, UK

Phone: +44(0)20 8778 1414 - e-mail: sales@hantarex.com - web: www.hantarex.com