

Chassis Monitor

20"

Specifications



Model Name	HANR20L100-CHA2-2
Viewable Size Image	20.1"
Active Display Area(mm)	408.0(H)x306.0(V)
Pixel Pitch(mm)	0.255(H)x0.255(V)
Number of Pixels	1600x1200(UXGA)
Contrast Ratio	1000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	300
Viewing Angle(CR>=10)	-89~89(H); -89~89(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1600x1200@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	60W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	SAW, Resistive

Remarks: HANR20L100 series= VGA Input only


HAN R20L110 series= VGA+Video Input



The Hantarex Semi Pro range of small, LCD chassis displays are housed in sleek metal housings which give them a custom design look. Wall mounting is achieved using a rear VESA connection.

They are offered in many different sizes from 6.5" in a 4:3 format up to 26" in a 16:9 format. They all have a standard PC (VGA) input but in addition can have video (PAL) and DVI inputs. The choice of screens is also impressive with standard, touch and transfective available.

Mechanical Drawing

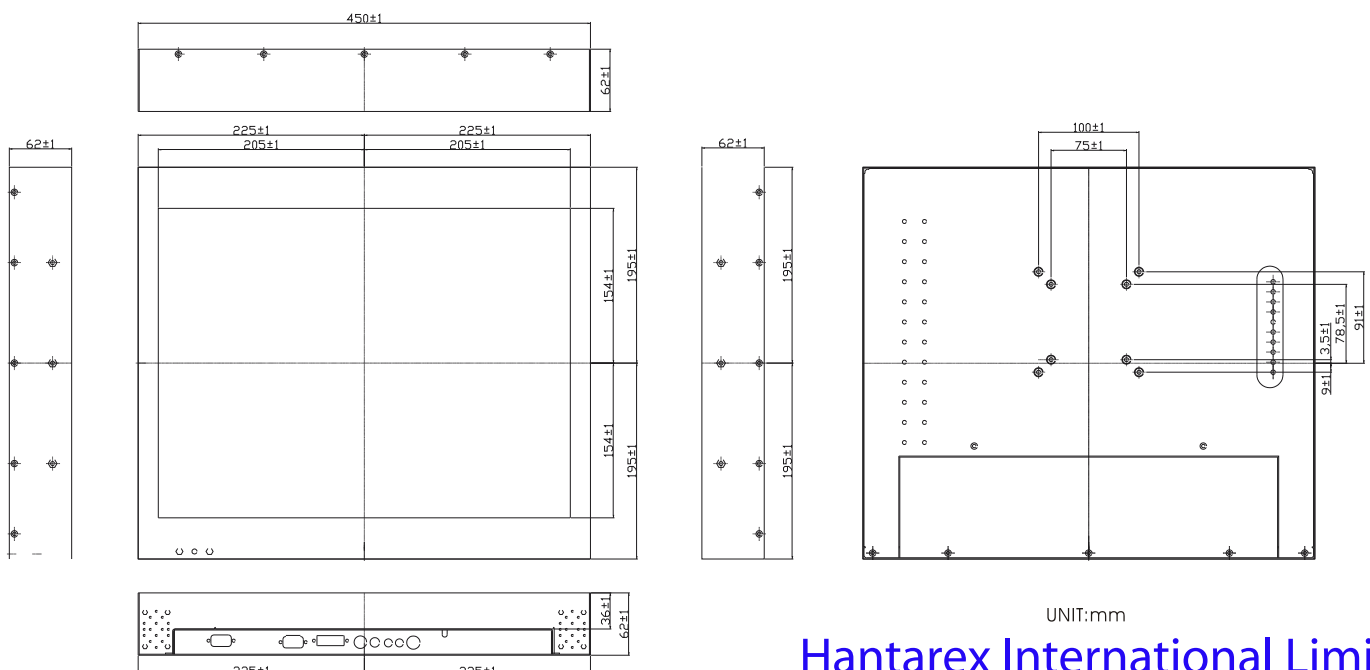

Hantarex International Limited

34, Salisbury Street, Marylebone, London NW8 8QE, UK

Phone: +44(0)20 8778 1414 - e-mail: sales@hantarex.com - web: www.hantarex.com