

Chassis Monitor



26"(16:9)

Specifications

Model Name	W26L100-CHA1
Viewable Size Image	26"(16:9)
Active Display Area(mm)	566.40(H)x339.84(V)
Pixel Pitch(mm)	0.4425x0.4425
Number of Pixels	1280x768
Contrast Ratio	600:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	500
Viewing Angle(CR>=10)	-85~85(H); -85~85(V)
Synchronization Range	31.5~47.6KHz/50~60Hz
Horizontal/Vertical	
Recommended Resolution	1280x768@60Hz
Signal Connector	15 pin D-sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	145W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes


Remarks:W26L100 series= VGA input

W26L110series= VGA+Video input

The Hantarex Semi Pro range of small, LCD chassis displays are housed in sleek metal housings which give them a custom design look. Wall mounting is achieved using a rear VESA connection.

They are offered in many different sizes from 6.5" in a 4:3 format up to 26" in a 16:9 format. They all have a standard PC (VGA) input but in addition can have video (PAL) and DVI inputs The choice of screens is also impressive with standard, touch and transfective available.

Mechanical Drawing

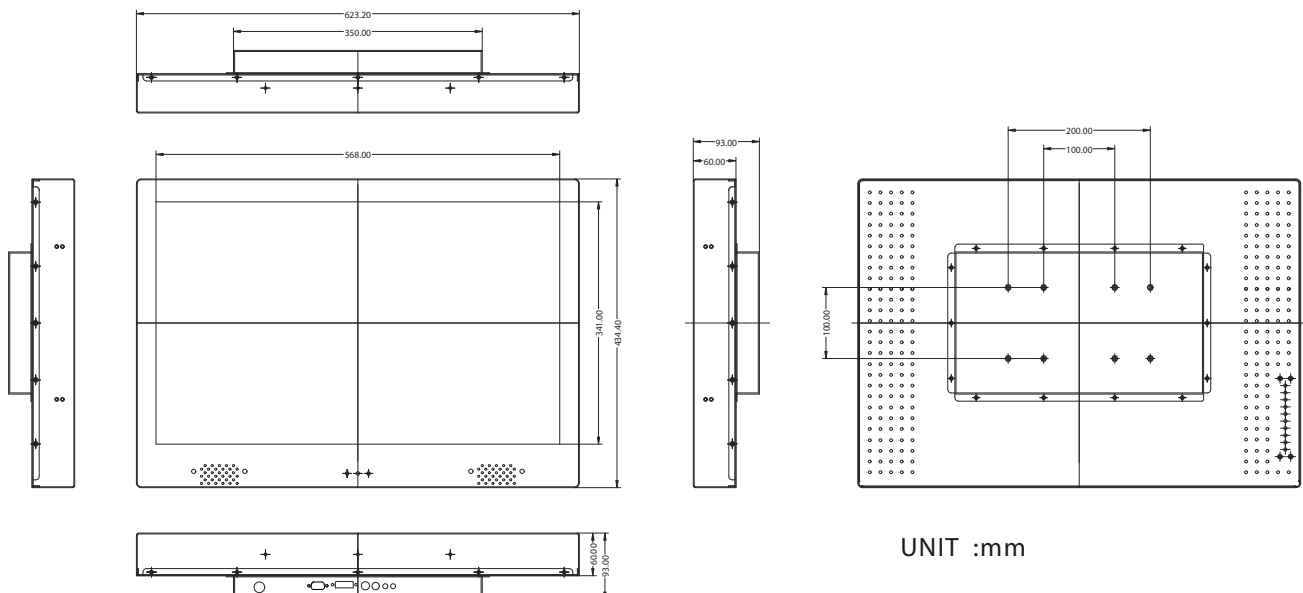

Hantarex International Limited

34, Salisbury Street, Marylebone, London NW8 8QE, UK

Phone: +44(0)20 8778 1414 - e-mail: sales@hantarex.com - web: www.hantarex.com