Hantarex International Limited 34 Salisbury Street London, NW8 8QE

32" HIGH BRIGHTNESS PROFESSIONAL MONITOR Tel: 0044 (0) 208 778 1414

e-Mail: sales@hantarex.com





24/7 Usage





High Definition Display





Plug and Play Media Player



Integrated



Multiple AV Inputs



Wide Viewing Angle









SUNLIGHT READABLE

Brightness is paramount when using outward facing screens, these displays use commercial grade Ultra High Brightness panels (1500 cd/m2); more than 3 times brighter than a standard home TV to allow easy readability in direct sunlight.





COMMERCIAL GRADE PANEL AND COMPONENTS

Fitted with a commercial grade panel, with a lifespan of 50,000 hours, and using high quality components ensures that this display can be in constant use 24/7.

ENVIRONMENTALLY FRIENDLY POWER TIMER

This allows for reduced power usage by automatically powering off in hours that the displays are not required. You can set daily On/Off times for your displays.





BUILT-IN MEDIA PLAYER

As well as having AV inputs, these displays also have a built-in HD media player allowing you to run content copied from a USB drive. Load your pictures and videos onto a USB memory stick then insert it into the display, the screen will then start playing the pictures and videos in a continuous loop.

32" HIGH BRIGHTNESS PROFESSIONAL MONITOR Tel: 0044 (0) 208 778 1414

e-Mail: sales@hantarex.com

ADVANCED TEMPERATURE CONTROL SYSTEM

The internal air-conditioning system allows the screens to be in constant use in an outward facing window. Internal fans keep the panel and other internal components at the optimum working temperature; ensuring a long and reliable life for your screens.







BUILT-IN SPEAKERS

The display has two integrated slimline speakers for applications that involve an audio element.









34 Salisbury Street London, NW8 8QE 32" HIGH BRIGHTNESS PROFESSIONAL MONITOR Tel: 0044 (0) 208 778 1414 e-Mail: sales@hantarex.com

DRAWING:



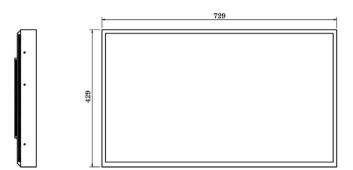





FULL SPECIFICATION:

32" High Brightness Professional Monitor	
Display Size	32 Inch
Resolution	1366x768
Display Area (mm)	700x394
Pixel Pitch	0.51075×0.51075
Unit Size (WxHxD mm)	729x429x78
Package Size (WxHxD mm)	875x575x180
VESA Holes (mm)	400x400
Net Weight (kg)	11.9
Gross Weight (kg)	13.9
Brightness (cd/m²)	1500
Colour	16.7M
Viewing Angle	178°
Contrast Ratio	4000:1
Power Consumption (W)	180
Input Voltage	AC110~240V(50Hz~60Hz)
Working Temperature	0 °C to 50 °C
Media Formats	Video (MPG, AVI, MP4),
	Audio (MP3, WMA), Image (JPG, BMP, PNG)
AV Signal Inputs	HDMI, VGA, Audio Socket (3.5mm)
Audio	2x2W, 4Ω
Lifespan (hours)	50,000
Accessories	Remote Control, User Manual, Power Lead