


lato frontale



lato posteriore

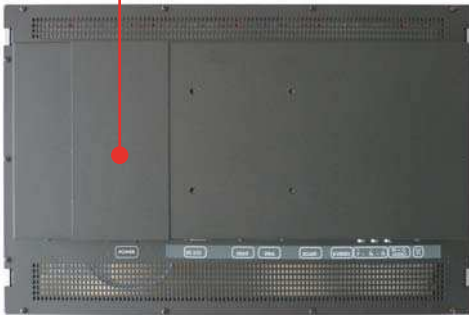

laterale



The new 22" model offers a smart functionality in the back cover, which includes a new maintenance opportunity. It has been designed to make easy and complete the access to the PSU, due to a small detachable "door". The detachable layer opens easily by means of pulling out a unique and simple jackscrew, showing immediately the electronics plate. With this new mechanics concept the power supply unit can be easily changed.

Display panel

Product name: LCD 22" PF W DVB-T monitor/TV
 Screen size: 22" (56 cm) diagonal
 Aspect Ratio: 16:10
 Resolution: 1680 (H) x 1050 (V) pixels
 Pixel pitch: 0.28 (H) x 0.28 (V) [mm]
 Display area: 473.7 (H) x 296.1 (V) [mm]
 Brightness: 300 cd/m²
 Contrast ratio: 1000:1
 Viewing angle: H:170°, V:160°
 Colors: 16.7 Mil
 Response time: 1.3 ms / 3.7 ms (Tr / Tf)

Connections

Video: 3 X RCA Component [Y,Pb,Pr]
 1 x mini DIN 4 pins S-Video [Y/C]
 1 x SCART [CVBS, RGB, RS232]
 PC: 1 x Dsub 15 HD Analog RGB [PC]
 1 x Digital RGB [HDMI]
 Tuner: Antenna [75 Ohm - VHF/UHF]
 Audio: 1x Jack 3.5mm audio input
 1x Jack 3.5mm Headphones
 Control: 1 x Dsub 9 RS232

Features

Video: PAL (BGH/D/I,M,N, 60), NTSC (M, 4.43), SECAM
 PC: VGA ~WXGA (1360x768)
 S-Video: 0.7 Vp-p +/- 5%
 HDMI: 480i/p, 576i/p, 720p, 1080p
 Component: 480i/p, 576i/p, 720p, 1080i
 Tuner: PAL BG/I/DK, SECAM L/L', DVB-T
 Electronic tuning via PLL
 Teletext: 1000 pages
 DTV: Pan-EU DVB-T
 Audio: Earphones
 Speakers: (optional)
 Control interfaces: Infrared Remote Control
 RS-232 Serial Port

Controls

Video: Contrast, Brightness, Colour, Sharpness
 Noise Reduction (Off, Low, Middle, High)
 Picture mode (Standard, Soft, Dynamic, Personal)
 Colour Temperature (Normal, Warm, Cold, Personal)
 Format (16:9, 4:3, Zoom1, Zoom2, Auto)
 480i/p, 576i/p, 720p, 1080p
 TV: Auto Tuning / Auto Sort
 Audio: Volume, Balance, Bass, Treble
 Sound mode (Personal, Standard, Music, Movie, Sports)
 Stereo / mono / NICAM/A2
 Automatic Volume Control / Surround Sound
 Other: Stand-by mode
 Timer sleep
 O.S.D. (On Screen Display)
 O.S.D. language: D, E, F, GB, I, NL, P

Physical

Dimensions: 515 (W) x 343 (H) x 68 (D)[mm]
 Weight: 5.6 Kg
 Mains voltage 115/230 VAC ± 15%, 50/60 Hz
 Power consumption: 43 W
 Operating conditions: Storage: -20°C to 65°C (max 85% RH non condensing)
 Working: 0°C to 50° (max 85% RH non condensing)

Accessories


Class protection: IP30
 Power cable
 Remote control with batteries
 User manual

Aesthetic specifications:
 PAINTED METAL FRAME (BLACK)
 PAINTED METAL BACK PANEL (BLACK)

PLAYFAIR LCD 22" TV/monitor



www.hantarex.com

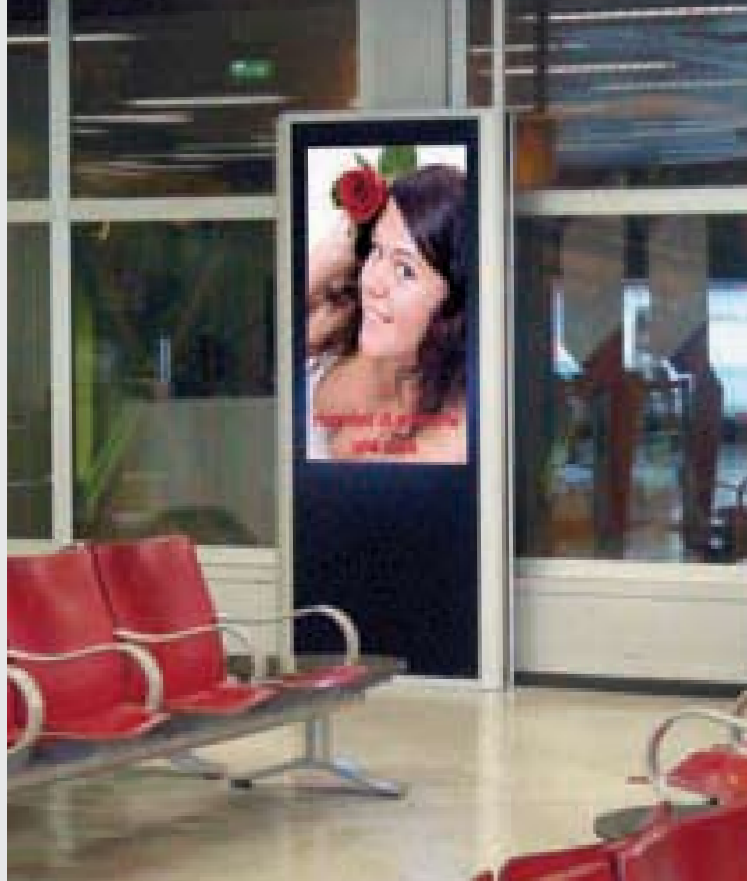

HANTAREX INTERNATIONAL LTD
Unit 14 - Forest Hill Business Centre
Clyde Vale
Forest Hill
London
SE23 3JF

Tel: +44(0) 20 8778 1414
Fax: +44(0) 20 8659 9348
www.hantarex.com
sales@hantarex.com

